Proof-of-Concept Integrated Work Zone Mapping Toolset

Testing Results

www.its.dot.gov/index.htm

Final Report - July 13, 2020

Prepared for:

FHWA-XXX-XXX: V2X Work Zone Mapping Toolset



Produced by ICF U.S. Department of Transportation ITS Joint Program Office – HOIT

Notice

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

The U.S. Government is not endorsing any manufacturers, products, or services cited herein and any trade name that may appear in the work has been included only because it is essential to the contents of the work.

Technical Report Documentation Page

1. Report No. FHWA-JPO-17-472B	2. Government Acc	ession No.	3. Recipient's Catalog No.	
4. Title and Subtitle	l		5. Report Date	
Proof of Concept Integrated	d Work Zone Toolset:	: Test Results	7/13/2020	
			6. Performing Organization	
			Code	
7. Author(s)			8. Performing Organization	
Denny Stephens (Vital Ass	urance), Tony Englis	h (Trihydro),	Report No.	
Nayel Ureña Serulle (ICF),	Deepak Gopalakrish	na (ICF), Vince	Task 2H: Installation and	
Garcia (Wyoming DOT)			Operational Readiness Testing	
9. Performing Organization	Name and Address		10. Work Unit No. (TRAIS)	
Wyoming DOT, 5300 Bisho	p Boulevard, Cheyer	nne, WY 82009		
ICF International, 1725 Eye			11. Contract or Grant No.	
Trihydro Corporation, 1252	Commerce Drive, La	aramie, WY	DTFH6116H00027	
82070				
Vital Assurance, 175 S. Thi 43215	ird St., Suite 200, Co	lumbus, OH		
12. Sponsoring Agency Na			13. Type of Report and Period	
U.S Department of Transpo	ortation 1200 New Je	rsey Ave, SE	Covered	
Washington, DC 20590			06/01/2020 to 7/13/2020	
			14. Sponsoring Agency Code	
15. Supplementary Notes Deborah Curtis (COR), Sar	ah Tarpgaard (CO)			
16. Abstract				
The purpose of the Proof of	f Concept (POC) test	is to verify the fu	unctionality and performance of	
			e work zone configuration, travel	
· ·		•	te a work zone map message in 3	
different formats that can b			-	
	_		ted in the companion document	
	tegrated Work Zone Mapping			
Toolset. That document summarizes system engineering archit POC system as well as a demonstration and testing plan. That				
summary of key elements s		o .	-	
17. Key Words		18. Distribution	Statement	
Connected Vehicle Technology, I-80 Corridor, This documer			is available to the public through	
Road Weather, Truck Safe	echnical Information Service,			
Architecture		Springfield, Virg	-	
19 Security Classif (of this	t 1.20 Security	Classif (of this	nage) 21 No. of 22	

None

Form DOT F 1700.7 (8-72)

report)

None

Reproduction of completed page authorized

Pages

Price

NA

Table of Contents

Chapter	1. Introduction	. 1
1.1	Project Scope	. 1
1.2	Purpose of this Test	. 1
1.3	Summary of Testing Procedures and Results	. 1
1.4	Document Organization	. 2
Chapter	2. Approval	. 3
Chapter	3. Test Procedure and Test Cases	. 4
3.1	Table WZ Mapping Toolset Test Case Summary	. 4
3.2	Step 1 Initialize Back Office Folders Results	11
3.3	Step 2 Initialize Laptop Application and Folders Results	12
3.4	Step 3 Prepare Testing WZ Track	13
3.5	Step 4 Verify TMC Configuration Creator Results	14
3.6	Step 5 Setup Laptop and WZ Path Application in Vehicle Results	17
3.7	Step 6 Confirm Track Clear and Participants Ready	18
3.8	Step 7 Driver Traverses Testing WZ Path	20
3.9	Step 8 Test Engineer Captures WZ Features	21
3.10	Step 9 Inspection of WZ Path and Features Results	23
3.11	Step 10 Verify WZDC Message Builder and Inspect RSM Message	26
3.12	Step 11 Verify WZDx and RSM(UPER) Translators	29
3.13	Step 12 Verify ZIP Archive Contents	30
3.14	Step 13 Trigger WZDC Upload	31
3.15	Step 14 Test TMC Website Visualizer	33
3.16	Step 15 Verify Availability of Published Messages	35
Chapter	4 References	37

List of Figures

Figure 1. Archer Complex Testing location	2
Figure 2 Table of distances between marked feature locations and independently measured feature locations (in meters)	27
Figure 3 Plot of distances from Figure 1	28
List of Tables	
List of Tables	
Table 1. WZ Mapping Toolset Test Case Summary	
Table 2. Step 1 - Initialize Back office folders	
Table 3. Step 2 - Initialize Laptop application and folders	12
Table 4. Step 3 - Prepare testing WZ Track	13
Table 5. Step 4 Verify TMC Configuration Creator Results	14
Table 6. Step 5 - Setup laptop and WZ Path Application in vehicle	17
Table 7. Step 6 - Confirm track clear and participants are ready for test	19
Table 8. Step 7 - Driver traverses testing WZ path	20
Table 9. Step 8 - Test Engineer Captures WZ Features	21
Table 10. Step – 9 Inspection of WZ Path and feature results	23
Table 11. Step 10 - Verify WZDX message builder and inspect RSM message	26
Table 12. Step 11 - Verify WZDx and RSM(UPER) Translators	29
Table 13. Step 12 - Verify ZIP archived contents	30
Table 14. Step 13 - Trigger WZDC Upload	32
Table 15. Step 14 - Test TMC Website Visualizer	33
Table 16. Step 15 - Verify availability of published messages	
Table 17 Referenced Documents, Sources, and Tools	37

Chapter 1. Introduction

1.1 Project Scope

Work zones are dynamic and change roadway characteristics frequently, affecting mobility and safety of traffic flow. Up-to-date information about dynamic conditions occurring on roads – such as construction events – is needed by both the traveling public, and by connected and automated vehicles (CAVs) to navigate work zones safely and efficiently. The objective of Task 6 of the V2X Mapping Project is to develop, test and demonstrate a proof of concept (POC) system for efficiently capturing a digital map of a work zone and its features, including lane closures and workers present in the work zone. These data are combined with other work zone configuration data to form a work zone map message that is published to disseminate to infrastructure owners and operators (IOO) traveler information systems, third-party traveler information systems, and ADS such as the FHWA CARMA vehicle. The work zone map message is to be published in WZDx V2 [1], SAE J2945/4 RSM (XML) [4], and SAE J2945/4 RSM (binary) [4] formats.

1.2 Purpose of this Test

The purpose of the Proof of Concept (POC) test is to verify the functionality and performance of the system which captures latitude, longitude and elevation of the work zone configuration, travel path and features. From this information we can accurately create a work zone map message in three different formats that can be shared with other Connected Vehicle systems.

The key system engineering elements for the POC are documented in the companion document System Engineering and Testing Plan for POC of Integrated Work Zone Mapping Toolset. That document summarizes system engineering architecture and requirements for the POC system as well as a testing plan. That document is intended only as summary of key elements sufficient to support POC testing. The interfaces of the POC system are described in the other companion document, the Interface Control Document (ICD) for POC of Integrated Work Zone Mapping Toolset.

1.3 Summary of Testing Procedures and Results

The test for the POC work zone mapping tool consists of a single vehicle equipped with a Ublox GPS device connect to a computer running the Work Zone Data Collection application, with access to the Work Zone configuration creator and internet.

These tests were executed at the Archer test site in Wyoming. This test site contains a large oval shaped roadway approximately 1.6 km in diameter, and some additional service roads with 0.5 km straight and curved road sections. The test site is located about 12 km East of Cheyenne WY, at the Archer exit on Interstate 80. All testing was completed on July 24th, 2020.



Figure 1. Archer Complex Testing location

The results from the tests are recorded in the results section of this document and organized by round of testing. The files created and generated by this tool include a configuration file (custom JSON), the path and features (CSV) file, RSM (UPER) message file, RSM (XML) file and WZDx (GeoJSON). Detailed information about each of these files are documented within the test case descriptions. The files generated from the testing as well as an Excel document used for calculations are located here: https://github.com/TonyEnglish/V2X-manual-data-collection/tree/master/Sample%20Files/Testing%20Data

Each step in the test plan in Table is performed 5 or 10 times. To pass the step, the pass/fail criteria must be met 5 out of the first 5 times or 9 out of first 10 times.

1.4 Document Organization

This Test Report document is organized into three chapters

- 1. Introduction
- 2. Approval
- 3. Test Procedure and Test Cases

Chapter 2. Approval

The following signatures indicate that this test result reported in this document have been reviewed and approved by:

Tom Cust	7/28/2020
Tony English (Lead Test Engineer)	Date
Delivian English	
Debbie English (Test Engineer)	<u>7/28/2020</u> Date
Sas, Je	7/28/2020_
Jacob Frye (Test Engineer)	Date

Chapter 3. Test Procedure and Test Cases

This chapter describes the testing and procedures to run each test. For each test, the steps and procedures are listed out by test name.

3.1 Table WZ Mapping Toolset Test Case Summary

Table 1 lists the steps for the test case summary.

Table 1. WZ Mapping Toolset Test Case Summary

Step	Activity	Action	Expected Result	Testing Requirements Verified
	_	Initialize and prepare for Te	esting	
1	Initialize Back Office Folders	 Empty Back Office File Folders including WZ Config {JSON} & WZ Map {RSM(XML)}, {RSM(binary)}, WZ Path & Features, and {WZDx} (Unzipped) File Folder Verified WZ Map {RSM(XML)}, {RSM(binary)}, and {WZDx} File Folder 	File folder inspection shows file folders are empty	
2	Initialize Laptop Application and Folders	Initialize Laptop Work Zone Data Collection Application. Empty Laptop File Folders including: • WZ Config {JSON} & WZ Path & Features {CSV} File Folder	Application open and ready for input File folder inspection shows file folders are empty	

Step	Activity	Action	Expected Result	Testing Requirements Verified
3	Prepare Testing WZ	 WZ Config {JSON} & WZ Map {RSM(XML)}, {RSM(binary)}, WZ Path & Features, and {WZDx} File Folder (Zipped) File Folder Set up Testing WZ including Cone Placement for 	Testing WZ is setup, measured, and	PRD-01, PRD-
	track	 Begin of WZ Begin of Lane Closure Begin of Workers Present End of Workers Present End of Lane Closure End of WZ Independently measure Lat/Long of work zone features within +/- 2m accuracy of Begin of WZ Begin of Lane Closure Begin of Workers Present End of Workers Present End of Lane Closure End of WZ 	ready for testing.	02, PRD-03, PRD-04, PRD- 05, PRD-06

Step	Activity	Action	Expected Result	Testing Requirements Verified
		Conduct Testing		
4	Verifies TMC Configuration Creator	 Test Engineer opens TMC Configuration Creator page and enters each parameter. Upon completion, WZ Config {JSON} file is saved and published to Azure cloud storage and downloaded to designated file folder. Test Engineer opens and displays WZ Config file using file inspection tool. Test engineer shows that WZ configuration parameters are correct. 	 Testing of Configuration Creator, including the following fields: Work Zone Description Number of lanes Vehicle Path Data Lane Average Lane Width Normal speed (before work zone) Work Zone Speed without workers Work Zone Type Start Date and Time End Date and Time Days of the Week in operation GPS location (latitude / longitude) for the beginning and end of work zone Entry of additional WZDx information: Beginning Cross Street Ending Cross Street Event Status Road Direction Accuracies – Beginning, Ending, Start Date and End Date Work Types Lane restrictions Lane Types 	PRT-01, PRT- 02, PRT-03, PRT-04, PRT- 06, PRT-07

Step	Activity	Action	Expected Result	Testing Requirements Verified
5	Setup Laptop and WZ Path Application in Vehicle	 Test engineer sets up laptop in vehicle, connecting GPS antenna and power as needed. Test engineer initiates WZDC application and verifies application is receiving valid GPS coordinates. Test engineer loads configuration file into WZDC application and verifies it has loaded the configuration file. Test engineer presses "Begin Data Collection" and verifies the application is ready to capture data. 	 Issuing Organization WZ Location Method LRS Type Location Verify Method Data Feed Frequency Update Contact Name Contact Email WZDC application and vehicle are ready for data collection. 	PRW-01, PRW- 02, PRW-03, PRW-04 PRT-02, PRT- 03, PRT-04
6	Confirm track is clear and all equipment and participants are ready to safely conduct testing.	 Driver confirms Testing WZ track is clear and testing is ready to proceed. Driver starts vehicle. Driver confirms all parties are ready to begin and all participants agree testing can be performed safely. 	Track and all participants are ready for data collection and ready for vehicle to traverse the Testing WZ.	

Step	Activity	Action	Expected Result	Testing Requirements Verified
		Vehicle Path Data Collec	tion	
7	Driver traverses testing WZ path	 Driver begins traversing the specified path adjacent to the work zone, accelerating to and holding 15 mph, adhering to the middle of the lane as much as practical. Driver continues to end of Testing WZ and stops vehicle. 	Vehicle containing testing participants traverses the Testing WZ.	
8	Test Engineer captures WZ path and features while traversing WZ path	While traversing the specified path adjacent to the work zone, the test engineer shows that the application automatically completes the following steps: Data collection begins Reference point is marked Data collection ends While traversing the specified path adjacent to the work zone, the test engineer toggles the WZDC Vehicle Path Data Acquisition application controls when perpendicular to each of the following: Begin of Lane Closure Begin of Workers Present End of Workers Present	 Data collection begins ~50m before the Begin of WZ marker Reference point is marked when roughly perpendicular to Begin of WZ Data collection ends when roughly perpendicular to End of WZ WZ Vehicle Path Data Acquisition Application captures path and feature lat/long data. 	PRW-05, PRW- 07, PRW-08, PRW-09, PRW- 11

Step	Activity	Action	Expected Result	Testing Requirements Verified
		Data and Map Message Asse	ssment	
9	Inspection of WZ Path & Features file	 Upon completion of the WZ Testing run Test engineer verifies that the WZ Path & Features {CSV} file is located in the designated laptop file folder. Test engineer opens and displays WZ Path & Features {CSV)} file using file inspection tool. Test engineer shows that WZ path and features lat/long are collected. (accuracy is verified in Step 10) 	WZ Path & Features File located in the specified laptop folder. Inspection of the WZ Path & Features file verifies that WZ path and features parameters were collected and stored in a CSV file.	PRW-06, PRW- 10, PRW-12
10	Verify WZDC message builder. Inspect WZ Map {RSM(XML)} File.	 Test engineer verifies that the WZ Map {RSM(XML)} File is in the designated laptop folder. Test Engineer opens and inspects WZ Map {RSM(XML)} File using file inspection tool. Test engineer verifies that WZ map path and features lat/long are captured. Test engineer analyzes results and shows that WZ map features (and lane tapers) lat/long are within specified tolerances. 	 WZ Map {RSM(XML)} file is located in the specified laptop folder. Inspection verifies that WZ map path and features lat/long were collected and stored in an RSM(XML) file. Analysis verifies that WZ map features (and lane tapers) lat/long are within acceptable tolerances. 	PRW-13, PRW- 13.1, PRW- 13.2, PRW- 13.3, PRW-14, PRW-17
11	Verify RSM(XML)- >WZDx Translator. Verify RSM(XML)-> {RSM(binary)} Translator.	 Test engineer verifies that the WZ Map {WZDx} file is located in the designated laptop file folder. Test engineer verifies that the WZ Map {RSM(binary)} file is located in the designated laptop file folder. 	WZ Map {WZDx and RSM (binary)} files are located in the specified laptop folder.	PRW-15, PRW-16,

Step	Activity	Action	Expected Result	Testing Requirements Verified
		 Test Engineer opens and displays WZ Map {WZDx} File using file inspection tool. Test engineer shows that WZ path and features parameters are consistent with WZ Map {RSM(XML)} file. 	Inspection verifies that WZ path and features parameters were collected and stored in WZDx file.	
12	Verify work zone data ZIP archive contents.	 Test engineer verifies that the ZIP archive is located in the specified laptop directory. Test engineer unzips local zip file and shows that all of the files are present 	Inspection shows that WZ Config, WZ Path & Features, WZ Map {RSM(XML)}, {RSM(binary)} & {WZDx} are present in the local unzipped archive.	PRW-18
13	Trigger WZDC tool to upload files to Back Office.	 Test engineer presses "Upload" on the WZDC application and verifies that the application displays a success message. Test engineer verifies that the ZIP archive is located in cloud storage. Test engineer verifies that messages and files are organized in cloud storage. 	Inspection shows that WZ Config, WZ Path & Features, WZ Map {RSM(XML)}, {RSM(binary)} & {WZDx} are uploaded and stored in the designated Back Office File folder (unzipped).	PRW-19, PRW- 20 PRT-10, PRT- 11
14	Verify TMC Website Visualizer.	 Test engineer activates the TMC Visualization and Verification application and loads the work zone. Test Engineer displays the WZ Map {RSM(XML)} & {WZDx} files to the independently measured lat/long and to the satellite map of the Testing WZ. Test Engineer verifies that the WZ Map {RSM(XML)} & {WZDx} files correctly depict Begin of WZ Begin of Lane Closure Begin of Workers Present 	Inspection confirms that verified WZ Map {RSM(XML)} & {WZDx} are stored in the designated Back Office File folder, ready for download by others.	PRT-12, PRT- 13, PRT-13.1, PRT-13.2, PRT- 13.3, PRT-13.4, PRT-13.5, PRT- 14, PRT-14.1, PRT-14.2, PRT- 15, PRT-16

Step	Activity	Action	Expected Result	Testing Requirements Verified
15	Verify availability of WZ Map {RSM(XML)} and WZ Map {WZDx} Files Third party traveler information services and for CARMA systems.	 End of Workers Present End of Lane Closure End of WZ Test Engineer verifies approval feature of application and storage of files in designated Back Office File Folder. Test Engineer opens, displays and confirms transfer of each of the WZ Map Files using file inspection tool. Test Engineer inspects file folders and shows WZ Map {RSM(XML)}, {RSM(binary)}, and {WZDx} Files are available for access by simulated Third party traveler information services and for CARMA systems. Test Engineer downloads all 3 messages and verifies the contents of the download ZIP archive using a file inspection tool 	Downloaded ZIP archive contains all 3 messages	PRT-17

3.2 Step 1 Initialize Back Office Folders Results

Table 2 describes the step to initialize the back office folders.

Table 2. Step 1 - Initialize Back office folders

Step #	Rep	Step 1	Test Engineer Verification and Remarks
Activity		Initialize Back Office Folders	

Step #	Rep	Step 1	Test Engineer Verification and Remarks
Test Case Completion Date		11 June 2020	
Results	Rep 1	Azure cloud storage folders emptied	Performed and confirmed by: DE, JF
Notes	Rep 1	None.	
Summary		All Azure cloud storage folders emptied.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.3 Step 2 Initialize Laptop Application and Folders Results

Table 3 describes the step to initialize the laptop application and folders.

Table 3. Step 2 - Initialize Laptop application and folders

Step #	Rep	Step 2	Test Engineer Verification and Remarks
Activity		Initialize Laptop Application and Folders	
Test Case Completion Date		11 June 2020	
Results	Rep 1	 Application initialized and ready for input Local output folders were empty of files 	Performed and confirmed by: DE, JF
Notes	Rep 1	None	
Summary		Application initialized and local folders emptied.	

Step #	Rep	Step 2	Test Engineer Verification and Remarks
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.4 Step 3 Prepare Testing WZ Track

Table 4 describes the step to prepare the testing on the work zone track.

Table 4. Step 3 - Prepare testing WZ Track

Step #	Rep	Step 3	Test Engineer Verification and Remarks
Activity		Prepare Testing WZ track	
Test Case Completion Date		11 June 2020	
Results		 testing work zone constructed and measured using Google Maps. Locations are as follows: (lat, long) Begin of WZ: (41.1469491, -104.655958) Begin of Lane Closure: (41.147228, -104.651442) Begin of Workers Present: (41.147951, -104.648074) End of Workers Present: (41.149419, -104.645261) End of Lane Closure: (41.149851, -104.644749) End of WZ: (41.15042906, -104.644422) 	Performed and confirmed by: DE, JF
Notes	Preliminary setup	Feature locations were set on intersections of cross streets. The locations of the features were determined using google maps and estimating the location of the feature in the center of the driven lane.	

Step #	Rep	Step 3	Test Engineer Verification and Remarks
Summary		Independent locations captured.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.5 Step 4 Verify TMC Configuration Creator Results

Table 5 describes the step to verify the TMC configuration creator results.

Table 5. Step 4 Verify TMC Configuration Creator Results

Step #	Rep	Step 4	Test Engineer Verification and Remarks
Activity		Verify TMC Configuration Creator	
Test Case Completion Date		11 June 2020	
Results	Rep 1	The following fields were entered into the configuration creator: Work Zone Description: accuracy-test-1 Number of lanes: 2 Vehicle Path Data Lane: 2 Average Lane Width: 3.6 Normal speed: 25 Work Zone Speed without workers: 20 Work Zone speed with workers: 15 Work Zone Type: maintenance	Performed and confirmed by: DE, JF

Step #	Rep	Step 4	Test Engineer Verification and Remarks
		Start Date and Time: 2020-06-15T06:00:00Z	
		End Date and Time: 2020-06-20T11:59:00Z	
		Days of the Week in operation: Mon, Tue, Wed, Thurs, Fri	
		GPS location (latitude / longitude) for the beginning and end of work zone:	
		Begin: (41.146949089427, -104.655958174084)	
		End: (41.1504290591271, -104.644421993111)	
		Beginning Cross Street: HR Ranch Road	
		Ending Cross Street: Laramie County Public Works	
		Event Status: planned	
		Road Direction: eastbound	
		 Accuracies – Beginning, Ending, Start Date and End Date: estimated 	
		Work Types: maintenance (false)	
		Lane restrictions:	
		Lane Restriction	
		Lane Number: 1	
		Restriction Type: no-trucks	
		Lane Restriction	
		Lane Number: 2	
		Restriction Type: towing-prohibited	
		Lane Types: left-lane, right-lane	
		Issuing Organization: Neaera Consulting	
		WZ Location Method: channel-device-method	
		LRS Type: interpolative	
		Location Verify Method: GPS equipment accurate to 1 m	
		Data Feed Frequency Update:	
		Contact Name: Jacob Frye	LLC Day arter out of Transportation

Step #	Rep	Step 4	Test Engineer Verification and Remarks
		Contact Email: <u>ifrye@neaeraconsulting.com</u>	
		All data was confirmed to be in configuration file	
Notes	Rep 1	None.	
Results	Rep 2	 Exactly the same as Rep 1, except for: Work Zone Description: accuracy-test-2 All data was confirmed to be in configuration file 	Performed and confirmed by: DE, JF
Notes	Rep 2	None.	
Results	Rep 3	 Exactly the same as Rep 1, except for: Work Zone Description: accuracy-test-3 All data was confirmed to be in configuration file 	Performed and confirmed by: DE, JF
Notes	Rep 3	None.	
Results	Rep 4	 Exactly the same as Rep 1, except for: Work Zone Description: accuracy-test-4 All data was confirmed to be in configuration file 	Performed and confirmed by: DE, JF
Notes	Rep 4	None.	
Results	Rep 5	 Exactly the same as Rep 1, except for: Work Zone Description: accuracy-test-5 All data was confirmed to be in configuration file 	Performed and confirmed by: DE, JF
Notes	Rep 5	None.	
Summary		All 5 configuration files created.	

Step #	Rep	Step 4	Test Engineer Verification and Remarks
Requirements Verified			
Pass/Fail Assessment		Pass	Performed and confirmed by: DE, JF

3.6 Step 5 Setup Laptop and WZ Path Application in Vehicle Results

Table 6 describes the step for setting up the laptop and the work zone in vehicle application.

Table 6. Step 5 - Setup laptop and WZ Path Application in vehicle

Step #	Rep	Step 5	Test Engineer Verification and Remarks
Activity		Setup Laptop and WZ Path Application in Vehicle	
Test Case Completion Date		11 June 2020	
Results	Rep 1	 Loaded configuration file accuracy-test-1 GPS connection was verified Data collection was initiated Pass 	Performed and confirmed by: DE, JF
Notes	Rep 1	None.	
Results	Rep 2	 Loaded configuration file accuracy-test-2 GPS connection was verified Data collection was initiated Pass 	Performed and confirmed by: DE, JF
Notes	Rep 2	None.	
Results	Rep 3	Loaded configuration file accuracy-test-3	Performed and confirmed by: DE, JF

Step #	Rep	Step 5	Test Engineer Verification and Remarks
		GPS connection was verified	
		 Data collection was initiated 	
		• Pass	
Notes	Rep 3	None.	
	Rep 4	Loaded configuration file accuracy-test-4	Performed and confirmed by: DE, JF
Results		GPS connection was verified	
		Data collection was initiated	
		Pass	
Notes	Rep 4	None.	
	Rep 5	Loaded configuration file accuracy-test-5	Performed and confirmed by: DE, JF
Results		GPS connection was verified	
		Data collection was initiated	
		Pass	
Notes	Rep 5	None.	
Summary		Configuration file loaded and application initialized correctly for 5/5 tests.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.7 Step 6 Confirm Track Clear and Participants Ready

Table 7 describes the step to confirm the track is clear and participants are read for the test.

Table 7. Step 6 - Confirm track clear and participants are ready for test

Step #	Rep	Step 6	Test Engineer Verification and Remarks
Activity		Confirm track is clear and all equipment and participants are ready to safely conduct testing.	
Test Case Completion Date		11 June 2020	
Results	Rep 1	Track inspected and participants readyPass	Performed and confirmed by: DE, JF
Notes	Rep 1	None.	
Results	Rep 2	Track inspected and participants readyPass	Performed and confirmed by: DE, JF
Notes	Rep 2	None.	
Results	Rep 3	Track inspected and participants readyPass	Performed and confirmed by: DE, JF
Notes	Rep 3	None.	
Results	Rep 4	Track inspected and participants readyPass	Performed and confirmed by: DE, JF
Notes	Rep 4	None.	
Results	Rep 5	Track inspected and participants readyPass	Performed and confirmed by: DE, JF
Notes	Rep 5	None.	
Summary		Track inspected for all 5 tests.	
Requirements Verified			

Step #	Rep	Step 6	Test Engineer Verification and Remarks
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.8 Step 7 Driver Traverses Testing WZ Path

Table 8 describes the step for traversing through the testing work zone path.

Table 8. Step 7 - Driver traverses testing WZ path

Step #	Rep	Step 7	Test Engineer Verification and Remarks
Activity		Driver traverses testing WZ path	
Test Case Completion Date		11 June 2020	
Results	Rep 1	Work zone was traversed.Pass	Performed and confirmed by: DE, JF
Notes	Rep 1	Speed was kept to ~15mph	
Results	Rep 2	Work zone was traversed.Pass	Performed and confirmed by: DE, JF
Notes	Rep 2	Speed was between 20 and 25 mph	
Results	Rep 3	Work zone was traversed.Pass	Performed and confirmed by: DE, JF
Notes	Rep 3	 Near features, driven speed was 15 mph. Between features speed was 25 mph 	
Results	Rep 4	Work zone was traversed.Pass	Performed and confirmed by: DE, JF

Step #	Rep	Step 7	Test Engineer Verification and Remarks
Notes	Rep 4	 Near features, driven speed was 15 mph. Between features speed was 25 mph 	
Results	Rep 5	Work zone was traversed.Pass	Performed and confirmed by: DE, JF
Notes	Rep 5	 Near features, driven speed was 15 mph. Between features speed was 25 mph 	
Summary		Work zone successfully traversed for 5/5 tests.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.9 Step 8 Test Engineer Captures WZ Features

Table 9 describes the step for capturing the work zone path features.

Table 9. Step 8 - Test Engineer Captures WZ Features

Step #	Rep	Step 8	Test Engineer Verification and Remarks
Activity		Test Engineer captures WZ path and features while traversing WZ path	
Test Case Completion Date		11 June 2020	
Results	Rep 1	 The following work zone features were automatically marked: Data collection began before Begin of WZ marker Reference Point marked at Begin of WZ marker Data collection terminated at End of WZ marker 	Performed and confirmed by: DE, JF

Step #	Rep	Step 8	Test Engineer Verification and Remarks
		The following work zone features were manually marked at the closest approach to their respective markers: Begin of Lane Closure Begin of Workers Present End of Workers Present End of Lane Closure Analysis of results is in Step 10 (Section 3.11).	
Notes	Rep 1	None.	
Results	Rep 2	Same as Rep 1	Performed and confirmed by: DE, JF
Notes	Rep 2	None.	
Results	Rep 3	Same as Rep 1	Performed and confirmed by: DE, JF
Notes	Rep 3	None.	
Results	Rep 4	Same as Rep 1	Performed and confirmed by: DE, JF
Notes	Rep 4	None.	
Results	Rep 5	Same as Rep 1	Performed and confirmed by: DE, JF
Notes	Rep 5	None.	
Summary		WZ features successfully marked for 5/5 tests.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.10 Step 9 Inspection of WZ Path and Features Results

Table 10 describes the step for inspecting the work zone path features.

Table 10. Step - 9 Inspection of WZ Path and feature results

Step #	Rep	Step 9	Test Engineer Verification and Remarks
Activity		Inspection of WZ Path & Features file	
Test Case Completion Date		11 June 2020	
	Rep 1	WZ Path and Features file (path-data—accuracy-test-1—Prairie Center Cir.csv) located in WZ_VehPathData directory	Performed and confirmed by: DE, JF
		WZ Path & Features file includes lat/long of the following features:	
		reference point: (41.14693775, -104.6559426)start of lane 1 closure: (41.14721825, -104.6514053)	
Results		• start of worker presence: (41.14794075, -104.6480925)	
		• end of lane 1 closure: (41.14988025, -104.6447271)	
		 end of data collection: (41.15044533, -104.6444045) 	
		Analysis of results is in Step 10 (Section 3.11).	
		Pass	
Notes	Rep 1	None.	

Step #	Rep	Step 9	Test Engineer Verification and Remarks
	Rep 2	WZ Path and Features file (path-data—accuracy-test-2—Prairie Center Cir.csv) located in WZ_VehPathData directory	Performed and confirmed by: DE, JF
		WZ Path & Features file includes lat/long of the following features:	
		reference point: (41.14693417, -104.655925)start of lane 1 closure: (41.14721033, -104.6514317)	
Results		 start of worker presence: (41.14793767, -104.6480783) 	
results		end of worker presence: (41.14940933, -104.6452732)	
		• end of lane 1 closure: (41.1498365, -104.644755)	
		end of data collection: (41.15043567, -104.644404)	
		Analysis of results is in Step 10 (Section 3.11).	
		Pass	
Notes	Rep 2	None.	
	Rep 3	WZ Path and Features file (path-data—accuracy-test-3—Prairie Center Cir.csv) located in WZ_VehPathData directory	Performed and confirmed by: DE, JF
		WZ Path & Features file includes lat/long of the following features:	
Results		reference point: (41.14694033, -104.6559437)	
		 start of lane 1 closure: (41.14721383, -104.6514683) 	
		start of worker presence: (41.14795267, -104.6480743)	
		• end of worker presence: (41.14939183, -104.6453025)	
		• end of lane 1 closure: (41.14981667, -104.6447728)	
		end of data collection: (41.15044817, -104.6443973)	

Step #	Rep	Step 9	Test Engineer Verification and Remarks
		Analysis of results is in Step 10 (Section 3.11).	
		pass	
Notes	Rep 3	None.	
	Rep 4	WZ Path and Features file (path-data—accuracy-test-4—Prairie Center Cir.csv) located in WZ_VehPathData directory	Performed and confirmed by: DE, JF
		WZ Path & Features file includes lat/long of the following features:	
		• reference point: (41.14693833, -104.6559413)	
		• start of lane 1 closure: (41.147207, -104.651522)	
Results		 start of worker presence: (41.14794933, -104.6481017) end of worker presence: (41.149408, -104.6452673) 	
		• end of lane 1 closure: (41.1498325, -104.6447458)	
		 end of data collection: (41.15044333, -104.6443927) 	
		Analysis of results is in Step 10 (Section 3.11).	
		Pass	
Notes	Rep 4	None.	
	Rep 5	WZ Path and Features file (path-data—accuracy-test-5—Prairie Center Cir.csv) located in WZ_VehPathData directory	
Results		WZ Path & Features file includes lat/long of the following features:	
		• reference point: (41.14693917, -104.6559362)	

Step #	Rep	Step 9	Test Engineer Verification and Remarks
		 start of lane 1 closure: (41.14721983, -104.6515067) start of worker presence: (41.14794167, -104.6481087) end of worker presence: (41.14939017, -104.6452877) end of lane 1 closure: (41.14982, -104.644757) end of data collection: (41.15044033, -104.6443947) Analysis of results is in Step 10 (Section 3.11). 	
Notes	Rep 5	None.	
Summary		WZ Path and Feature Files found and locations extracted for 5/5 tests.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF


3.11 Step 10 Verify WZDC Message Builder and Inspect RSM Message

Table 11 describes the step for inspecting the RSM message.

Table 11. Step 10 - Verify WZDX message builder and inspect RSM message

Step #	Rep	Step 10	Test Engineer Verification and Remarks
Activity		Verify WZDC message builder. Inspect WZ Map {RSM(XML)} File.	

Step #	Rep	Step 10						Test Engineer Verification and Remarks
Test Case Completion Date		11 June 2020						
Results	Rep 1	Compiled in Su	mmary					Performed and confirmed by: DE, JF
Notes	Rep 1	None.						
Results	Rep 2	Compiled in Su	mmary					Performed and confirmed by: DE, JF
Notes	Rep 2	None.						
Results	Rep 3	Compiled in Su	mmary					Performed and confirmed by: DE, JF
Notes	Rep 3	None.						
Results	Rep 4	Compiled in Su	mmary					Performed and confirmed by: DE, JF
Notes	Rep 4	None.						
Results	Rep 5	Compiled in Su	mmary					Performed and confirmed by: DE, JF
Notes	Rep 5	None.						
		-	Γest 1 Te	est 2 T	est 3 Te	est 4 T	est 5	
		Begin WZ	1.81	3.24	1.56	1.85	2.15	
		Begin LC	3.25	2.14	2.71	7.09	5.49	
		Begin WP	Begin WP 1.92 1.52 0.19 2.32 3.08				3.08	
Summary		End WP	2.89	1.48	4.6	1.33	3.91	
		End LC	3.73	1.69	4.31	2.07	3.51	
		End WZ	2.33	1.67	2.96	2.92	2.61	
		Figure 2. Dista independen						

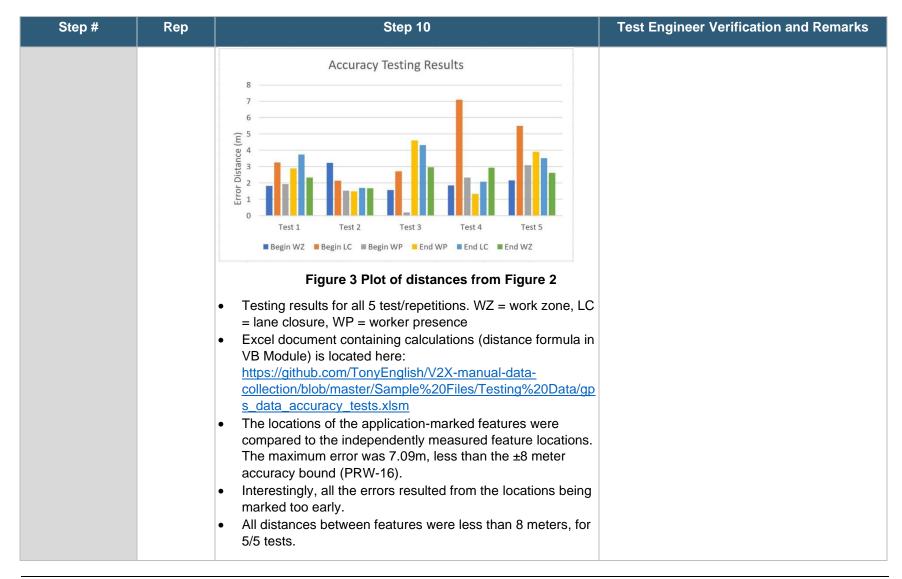

Step #	Rep	Step 10	Test Engineer Verification and Remarks
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.12 Step 11 Verify WZDx and RSM(UPER) Translators

Table 12 describes the step to inspect WZDx and RSM(UPER) translator.

Table 12. Step 11 - Verify WZDx and RSM(UPER) Translators

Step	Rep	Step 11	Test Engineer Verification and Remarks
Activity		Verify RSM(XML)->WZDx Translator. Verify RSM(XML)-> {RSM(UPER)} Translator	
Test Case Completion Date		11 June 2020	
Results	Rep 1	 WZDx and RSM(UPER) files located in WZ_MapMsg directory Pass 	Performed and confirmed by: DE, JF
Notes	Rep 1	None.	
Results	Rep 2	 WZDx and RSM(UPER) files located in WZ_MapMsg directory Pass 	Performed and confirmed by: DE, JF
Notes	Rep 2	None.	
Results	Rep 3	 WZDx and RSM(UPER) files located in WZ_MapMsg directory Pass 	Performed and confirmed by: DE, JF

Step	Rep	Step 11	Test Engineer Verification and Remarks
Notes	Rep 3	None.	
Results	Rep 4	 WZDx and RSM(UPER) files located in WZ_MapMsg directory Pass 	Performed and confirmed by: DE, JF
Notes	Rep 4	None.	
Results	Rep 5	 WZDx and RSM(UPER) files located in WZ_MapMsg directory Pass 	Performed and confirmed by: DE, JF
Notes	Rep 5	None.	
Summary		WZDx and RSM(UPER) files automatically created for 5/5 tests.	
Requirements Verified			
Pass/Fail Assessment		Pass	Performed and confirmed by: DE, JF

3.13 Step 12 Verify ZIP Archive Contents

Table 13 describes the step for revise the ZIP archived contents.

Table 13. Step 12 - Verify ZIP archived contents

Step #	Rep	Step 12	Test Engineer Verification and Remarks
Activity		Verify work zone data ZIP archive contents.	
Test Case Completion Date		11 June 2020	

Step #	Rep	Step 12	Test Engineer Verification and Remarks
Results	Rep 1	All 5 data files present in unzipped archivePass	Performed and confirmed by: DE, JF
Notes	Rep 1	None.	
Results	Rep 2	All 5 data files present in unzipped archivePass	Performed and confirmed by: DE, JF
Notes	Rep 2	None.	
Results	Rep 3	All 5 data files present in unzipped archivePass	Performed and confirmed by: DE, JF
Notes	Rep 3	None.	
Results	Rep 4	 All 5 data files present in unzipped archive Pass 	Performed and confirmed by: DE, JF
Notes	Rep 4	None.	
Results	Rep 5	 All 5 data files present in unzipped archive Pass 	Performed and confirmed by: DE, JF
Notes	Rep 5	None.	
Summary		ZIP archive correctly generated for 5/5 tests.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.14 Step 13 Trigger WZDC Upload

Table 14 describes the step for triggering the work zone DC upload.

Table 14. Step 13 - Trigger WZDC Upload

Step #	Rep	Step 13	Test Engineer Verification and Remarks
Activity		Trigger WZDC tool to upload files to Back Office.	
Test Case Completion Date		11 June 2020	
Results	Rep 1	 ZIP archive present in cloud storage container All 5 data files organized into sub-folders in unzipped cloud storage container Pass 	Performed and confirmed by: DE, JF
Notes	Rep 1	None.	
Results	Rep 2	 ZIP archive present in cloud storage container All 5 data files organized into sub-folders in unzipped cloud storage container Pass 	Performed and confirmed by: DE, JF
Notes	Rep 2	None.	
Results	Rep 3	 ZIP archive present in cloud storage container All 5 data files organized into sub-folders in unzipped cloud storage container Pass 	Performed and confirmed by: DE, JF
Notes	Rep 3	None.	
Results	Rep 4	 ZIP archive present in cloud storage container All 5 data files organized into sub-folders in unzipped cloud storage container Pass 	Performed and confirmed by: DE, JF
Notes	Rep 4	None.	
Results	Rep 5	ZIP archive present in cloud storage container	Performed and confirmed by: DE, JF

Step #	Rep	Step 13	Test Engineer Verification and Remarks
		 All 5 data files organized into sub-folders in unzipped cloud storage container Pass 	
Notes	Rep 5	None.	
Summary		ZIP archive uploaded and automatically unzipped for 5/5 tests.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.15 Step 14 Test TMC Website Visualizer

Table 15 describes the step for testing the TMC website visualizer.

Table 15. Step 14 - Test TMC Website Visualizer

Step #	Rep	Step 14	Test Engineer Verification and Remarks
Activity		Test TMC Website Visualizer	
Test Case Completion Date		11 June 2020	
Results	Rep 1	 Visualization of RSM shows all 6 WZ features On publish, all 3 messages are located in the published cloud storage container. Pass 	Performed and confirmed by: DE, JF
Notes	Rep 1	None.	
Results	Rep 2	Visualization of RSM shows all 6 WZ features	Performed and confirmed by: DE, JF

Step #	Rep	Step 14	Test Engineer Verification and Remarks
		 On publish, all 3 messages are located in the published cloud storage container. Pass 	
Notes	Rep 2	None.	
Results	Rep 3	 Visualization of RSM shows all 6 WZ features On publish, all 3 messages are located in the published cloud storage container. Pass 	Performed and confirmed by: DE, JF
Notes	Rep 3	None.	
Results	Rep 4	 Visualization of RSM shows all 6 WZ features On publish, all 3 messages are located in the published cloud storage container. Pass 	Performed and confirmed by: DE, JF
Notes	Rep 4	None.	
Results	Rep 5	 Visualization of RSM shows all 6 WZ features On publish, all 3 messages are located in the published cloud storage container. Pass 	
Notes	Rep 5	None.	
Summary		Visualizations correctly generated and messages published for 5/5 tests.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

3.16 Step 15 Verify Availability of Published Messages

Table 16 describes the step to verify the availability of published messages.

Table 16. Step 15 - Verify availability of published messages

Step #	Rep	Step 15	Test Engineer Verification and Remarks
Activity		Verify availability of WZ Map {RSM(XML)} and WZ Map {WZDx} Files Third party traveler information services and for CARMA systems.	
Test Case Completion Date		11 June 2020	
Results	Rep 1	 All 3 messages present in downloaded ZIP archive Pass 	Performed and confirmed by: DE, JF
Notes	Rep 1	None.	
Results	Rep 2	 All 3 messages present in downloaded ZIP archive Pass 	Performed and confirmed by: DE, JF
Notes	Rep 2	None.	
Results	Rep 3	 All 3 messages present in downloaded ZIP archive Pass 	Performed and confirmed by: DE, JF
Notes	Rep 3	None.	
Results	Rep 4	 All 3 messages present in downloaded ZIP archive Pass 	Performed and confirmed by: DE, JF
Notes	Rep 4	None.	
Results	Rep 5	 All 3 messages present in downloaded ZIP archive Pass 	Performed and confirmed by: DE, JF
Notes	Rep 5	None.	

Step #	Rep	Step 15	Test Engineer Verification and Remarks
Summary		Messages successfully downloaded for 5/5 tests.	
Requirements Verified			
Pass/Fail Assessment		• Pass	Performed and confirmed by: DE, JF

Chapter 4. References

Table 17 lists the documents, sources, and tools referenced in this report.

Table 17. Referenced Documents, Sources, and Tools

#	Document (Title, source, version, date, location)
1	Work Zone Data Exchange (WZDx) v2 Specification, Federal Highway Administration (FHWA) and Intelligent Transportation Systems Joint Program Office (IT'S JPO), Jan 14, 2020.
	https://github.com/usdot-jpo-ode/jpo-wzdx/
2	Work Zone Data Initiative (WZDI), Federal Highway Administration (FHWA).
	https://collaboration.fhwa.dot.gov/wzmp/wzdi/Forms/AllItems.aspx
3	Work Zone Event Data (WZED) – Data Dictionary Report, Federal Highway Administration (FHWA), Version 3, Feb 28,2020.
	https://collaboration.fhwa.dot.gov/wzmp/Data%20DictionaryDocuments/Forms/AllItems.aspx
4	SAE J2945/4 – Road Safety Applications – UNPUBLISHED
	http://standards.sae.org/j2945/1_201603/
5	V2I Safety Applications, Connected Work Zone Software Toolchain User Guide
	CAMP LLC Vehicle to Infrastructure Consortium, Version 1.1, September 3, 2019.
	https://www.campllc.org/download-software-tools/
6	Task 2 Technical Memo – Compiled Report, Infrastructure and V2X Mapping Needs Assessment and Development Support Project, ICF Draft Report to Federal Highway Administration (FHWA),
7	Task 3 Stakeholder Outreach Memo, Infrastructure and V2X Mapping Needs Assessment and Development Support Project, ICF Draft Report to Federal Highway Administration (FHWA).
8	Design and Evaluation of a Connected Work Zone Hazard Detection and Communication System for Connected and Automated Vehicles (CAVs), Office of the Secretary of Transportation (OST), USDOT, Final Report, August 2019.
	https://www.vtti.vt.edu/utc/safe-d/wp-content/uploads/2019/10/03-050 FinalResearchReport Final.pdf
9	POC TMC Website, Proof-of-Concept of Integrated Work Zone Mapping Toolset Project, Federal Highway Administration (FHWA).
	https://github.com/TonyEnglish/V2X-manual-data-collection

10	POC Work Zone Data Collection Tool, Proof-of-Concept of Integrated Work Zone Mapping Toolset Project, Federal Highway Administration (FHWA).
	https://github.com/TonyEnglish/V2X-manual-data-collection/tree/master/Work%20Zone%20Data%20Collection%20Tool
11	SAE J2945/1_201603 - On-Board System Requirements for V2V Safety Communications, SAE International, March 30, 2016.
	http://standards.sae.org/j2945/1_201603/
12	V2X Hub, Federal Highway Administration (FHWA).
	https://github.com/usdot-fhwa-OPS/V2X-Hub
13	Manual on Uniform Traffic Control Devices (USDOT).
	https://mutcd.fhwa.dot.gov/htm/2009/part6/part6c.htm

U.S. Department of Transportation ITS Joint Program Office – HOIT 1200 New Jersey Avenue, SE Washington, DC 20590

Toll-Free "Help Line" 866-367-7487

www.its.dot.gov

[FHWA Document Number]



U.S. Department of Transportation